

Raidon iR8822 2xCD-ROM Bay 3.5-Inch Internal RAID Module for 2xM.2 SATA SSD

Equipped with LCD display and LED indicators, and providing RAID button setting for RAID-1 and RAID-0 that improve data RW performance, and also can prevent system downtime caused by single hard drive failure


[Raidon Technology, Inc.](#) announces the [iR8822](#), a 2 CD-ROM Bay 3.5" Internal RAID module designed in 2 CD-ROM bays for 2xM.2 SATA SSD (2242/2260/2280), and provides RAID mode button setting, has trays with key lock, and is built in LCD display and LED indicators for system monitoring the hard disk status.



The iR8822 provides RAID button setting for RAID-1 and RAID-0 that can improve data RW performance, and also can prevent system downtime caused by a single hard drive failure. It is equipped with a readable LCD display and LED indicators for system monitoring during operation so that users can check the status at all times.



Besides LCD display, the iR8822 also provides monitoring utility to check the status so that users can know all of the RAID status and disk capacity information. It also supports email notification function that it can send the message to user automatically if the disk is removed or failed, allows users to do some response for the failure to remedy the situation.

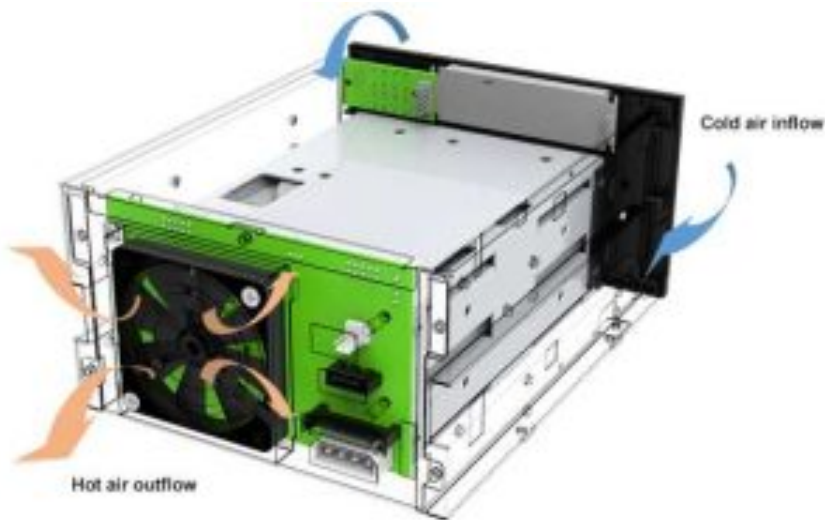

The iR8822 comes with the company's standard hot-swappable drive tray with lock to secure the drive in place, and to protect the data safely. Besides, it is equipped with the 6cm silent fan for the heat dissipation and to extend the usage cycle of hard drives. It fits in 2 CD ROM bay drive size that can match servers, industrial computers and workstations.

Features:

- Supports 2xM.2 SATA SSD
- Supports RAID mode button for RAID-0/1
- Built in LCD display and LED indicators
- Hot swappable drive tray with key lock
- Silent fan for heat dissipation
- Provide Software monitoring program for status check



- A. Mute Button
- B. HDD status indicator LED
- C. Key Lock
- D. HDD tray
- E. LCD Display
- F. RAID Setting Button
- G. Alarm indicator LED



- H. RS232 Port
- I. 3.5" HDD SATA Port (for host)
- J. Power Socket
- K. Cooling Fan

Interfaces	1 x SATA III (6Gbps)
Compatible Drive	2 x M.2 SATA SSD (2242/2260/2280)
Certification	CE / FCC
RAID Mode	RAID 1 / RAID 0
Operating System Support	Windows, Linux
Cooling Fan	1 x 6cm Fan
Electrical and Operating Requirements	*Line voltage: 12V+5V, DC *Operating temperature: 0° to 40° C (32° to 104° F) *Storage temperature: -20° to 47° C (-4° to 116° F) *Relative humidity: 5% to 95%, no condensing
Size	Height: 84 mm Width: 148 mm Depth: 202 mm
Product Code	EAN : UPC :
Carton	8 pcs per carton
Package Accessories	1 x iR8822 1 x SATA Cable 1 x Accessory 1 x Quick Installation Guide