

Stardom 3S2U+ 1-Bay Adapter HDD/SSD External Storage with USB Type-C

Supports USB 3.2 Gen 2 and provides 24W USB power delivery and one mini display port for DP1.1a.

[Stardom](#), a brand from [RAIDON Technology Inc.](#), announces [3S2U+](#) 1-bay adapter HDD/SSD external storage comes with USB Type-C interface that supports USB 3.2 Gen 2, provides 24W USB power delivery and one mini display port for DP1.1a.

3S2U+ Adapter




It can install 1x2.5"/3.5" SATA-3 HDD/SSD, provides USB Type C to C cable, and supports drive hot swappable and plug and play.



The 3S2U+ adapter provides one USB 3.2 Gen 2 Type-c to C cable that has all in one. It can connect to any PC or notebook with USB Type-C or Thunderbolt 3 (USB-C) interface, the transmission performance can be up to 10Gb/s. Whether it is used for searching files, editing photos or watching the 4K high resolution videos.

One USB-C Cable

More Speed, Smart Charge (24W), More Pixels

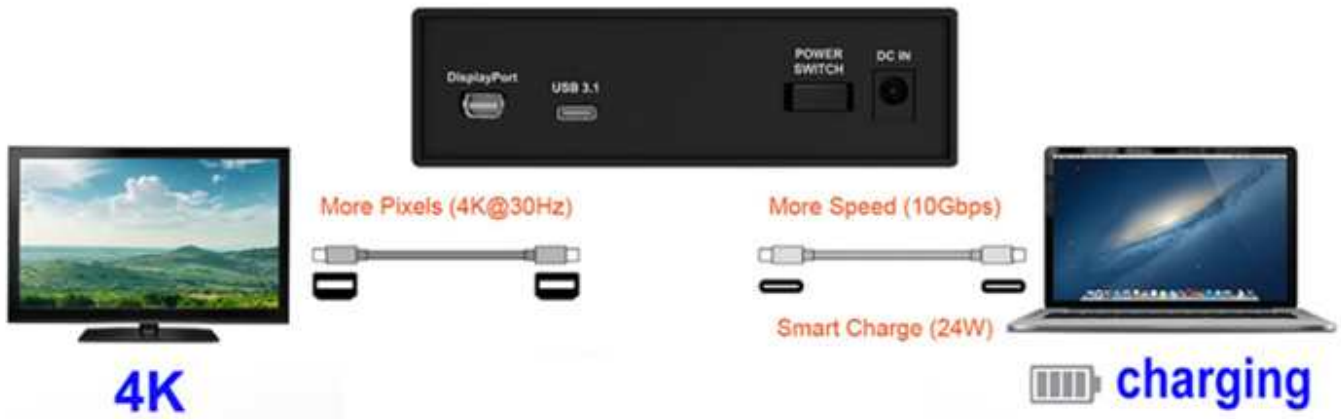


Besides, the 3S2U+ adapter also provides USB PD (Power Delivery) of 24W (12V/2A)/ 18W (9V/2A) / 15W (5V3A) charging for notebook, and 1xDP 1.1a Mini DisplayPort for the 2nd monitor expansion. It is compatible with the existing display port screens, devices that can be connected with DVI, HDMI, and VGA screens.

It supports JBOD independent mode, and can support various kinds of 2.5"/3.5" HDD/SSD.

Features

- Supports USB 3.2 Type-C interface
- Supports USB and Thunderbolt 3 host computer
- Supports 1x2.5"/3.5" SATA HDD/SSD
- Provides USB 3.2 Type C to C cable, up to 10Gb/s.
- Supports JBOD independent mode
- Supports 24W (12V/2A) / 18W (9V/2A) / 15W (5V3A) Power Delivery
- Supports Mini Display Port DP1.1a for 2nd monitor expansion
- Supports drive hot swappable, plug and play
- For Mac and PC

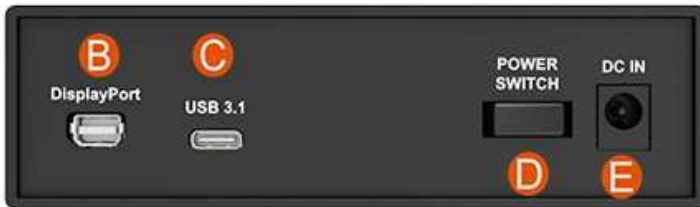

- A. HDD status indicator LED
- B. DisplayPort (DP 1.1) x1
- C. USB 3.2 Gen 2 Port (10Gbps) x1
- D. Power Switch
- E. Power Port (DC IN)
- F. 7+15 Pin SATA Connector



Interfaces	1 x USB 3.2 Gen2 USB-C (10Gbps) 1 x miniDisplayPort (DP 1.1a)
Compatible Drive	1 x 3.5" / 2.5" SATA Hard Disk (HDD) or Solid State Disk (SSD)
Certification	CE / FCC
Operation System Support	Windows 7 or above, macOS 10.10 or above, Linux
Electrical and Operating Requirements	*Line voltage: 100-240V, AC *Frequency: 50Hz to 60Hz, single phase *Maximum continuous power: 50W *Operating temperature: 0°to 40°C (32°to 104°F) *Storage temperature: -20°to 47°C (-4°to 116°F) *Relative humidity: 5% to 95%, no condensing
Dimension	Height: 35 mm Width: 122 mm Depth: 58 mm
Product Code	EAN: UPC:
Carton	
Package Accessories	1 x 3S2U+ Adapter 1 x USB Type C to Type C cable 1 x Adapter 1 x Power cable 1 x Quick Installation Guide Accessory