Raidon iT2300 JBOD CD ROM Bay for 2×2.5-Inch and 1×3.5-Inch SATA HDD/SSD

Comes with metal trays with lock, LED hard drive indicator and silent fan for heat dissipation.

<u>Raidon Technology, Inc</u>. announces the internal storage <u>iT2300</u>, designed in one CD ROM bay for 2×2.5 " SATA HDD/SSD and 1×3.5 " SATA HDD/SSD, supports JBOD independent volume, and comes with metal trays with lock.



The iT2300 is built in 2-in-1 design, that can be fit in 1x5.25" CD-ROM size and install $2\times2.5"$ SATA HDD/SSD and $1\times2.5"/3.5"$ SATA HDD/SSD. It provides JBOD independent capacity mode, so the **3 HDD/SSD data are stored separately**. It also provides the LED indicators on the front panel to make operation and maintenance.


iT2300 with 2×2.5" HDD



It provides users diversified applications. It can be used on JBOD storage mode to install 3 independent HDD/SSD to exchange data with each other, or take out the hard drive and tray to other external boxes, so that users can carry it to the office when go out. Or iT2300 **can match with a RAID card to set to 2.5**" **RAID-0/1**, and match with its 3.5" JBOD mode, to let the data backup safely at any time, and ensure that the data can be stored for a long time.



The iT2300 comes with the 2×2.5 " and 1×3.5 " hot swappable metal drive trays with lock to secure the drive in place and to protect the data safely. Besides, it is equipped with the 4cm silent fan for the better heat dissipation and the usage of hard drives extension. It is the dual function storage offering the backup data security and also for on the go data transport. It is a choice JBOD internal storage and suitable for file servers, industrial computers, and workstations.

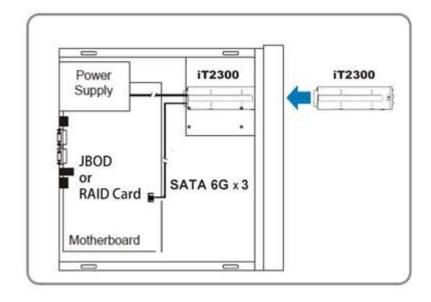

Features

- Support JBOD
- Support 2×2.5" SATA HDD/SSD and 1×3.5"/2.5" SATA HDD/SSD
- Support LED hard drive indicator
- Hot swappable drive trays with key lock
- Silent fan for heat dissipation



- A 2.5" HDD status indicator LED
- B. 3.5" HDD status indicator LED
- C. 2.5" Tray Key Lock
- D. 3.5" Tray Key Lock
- E. 3.5" HDD tray
- F. 2.5" HDD tray

G. 7 Pin SATA Connector x | H. 7+15 Pin SATA Connector x 2 I. Cooling Fan

Model No.	iT2300
Interface	3 x SATA III (6Gbps) Port
Compatible Disk	2 x 2.5" SATA Disk (HDD/SSD) + 1 x 3.5" /2.5" SATA Disk (HDD/SSD)
Certification	CE / FCC
RAID Modes	3 x JBOD (Single)
Operating System	Windows • Linux
Cooling System	1 x 4cm Low Noise Fan
Electrical and Operating Requirements	 Line voltage: 12V + 5V DC Operating temperature: 32° to 104° F (0° to 40° C) Storage temperature: -4° to 116° F (-20° to 47° C) Relative humidity: 5% to 95% non-condensing
Dimension and Weight	Height: 42 mm Width: 146 mm Depth: 198 mm
Product Code	EAN: UPC:
Carton	10pcs per carton
Package Accessories	1 x iT2300 2 x SATA cable 1 x Accessory kit 1 x Quick Installation Guide